Two Channel Purity Monitor Assembly Pictures

- See Power Point notes for detail about pictures.

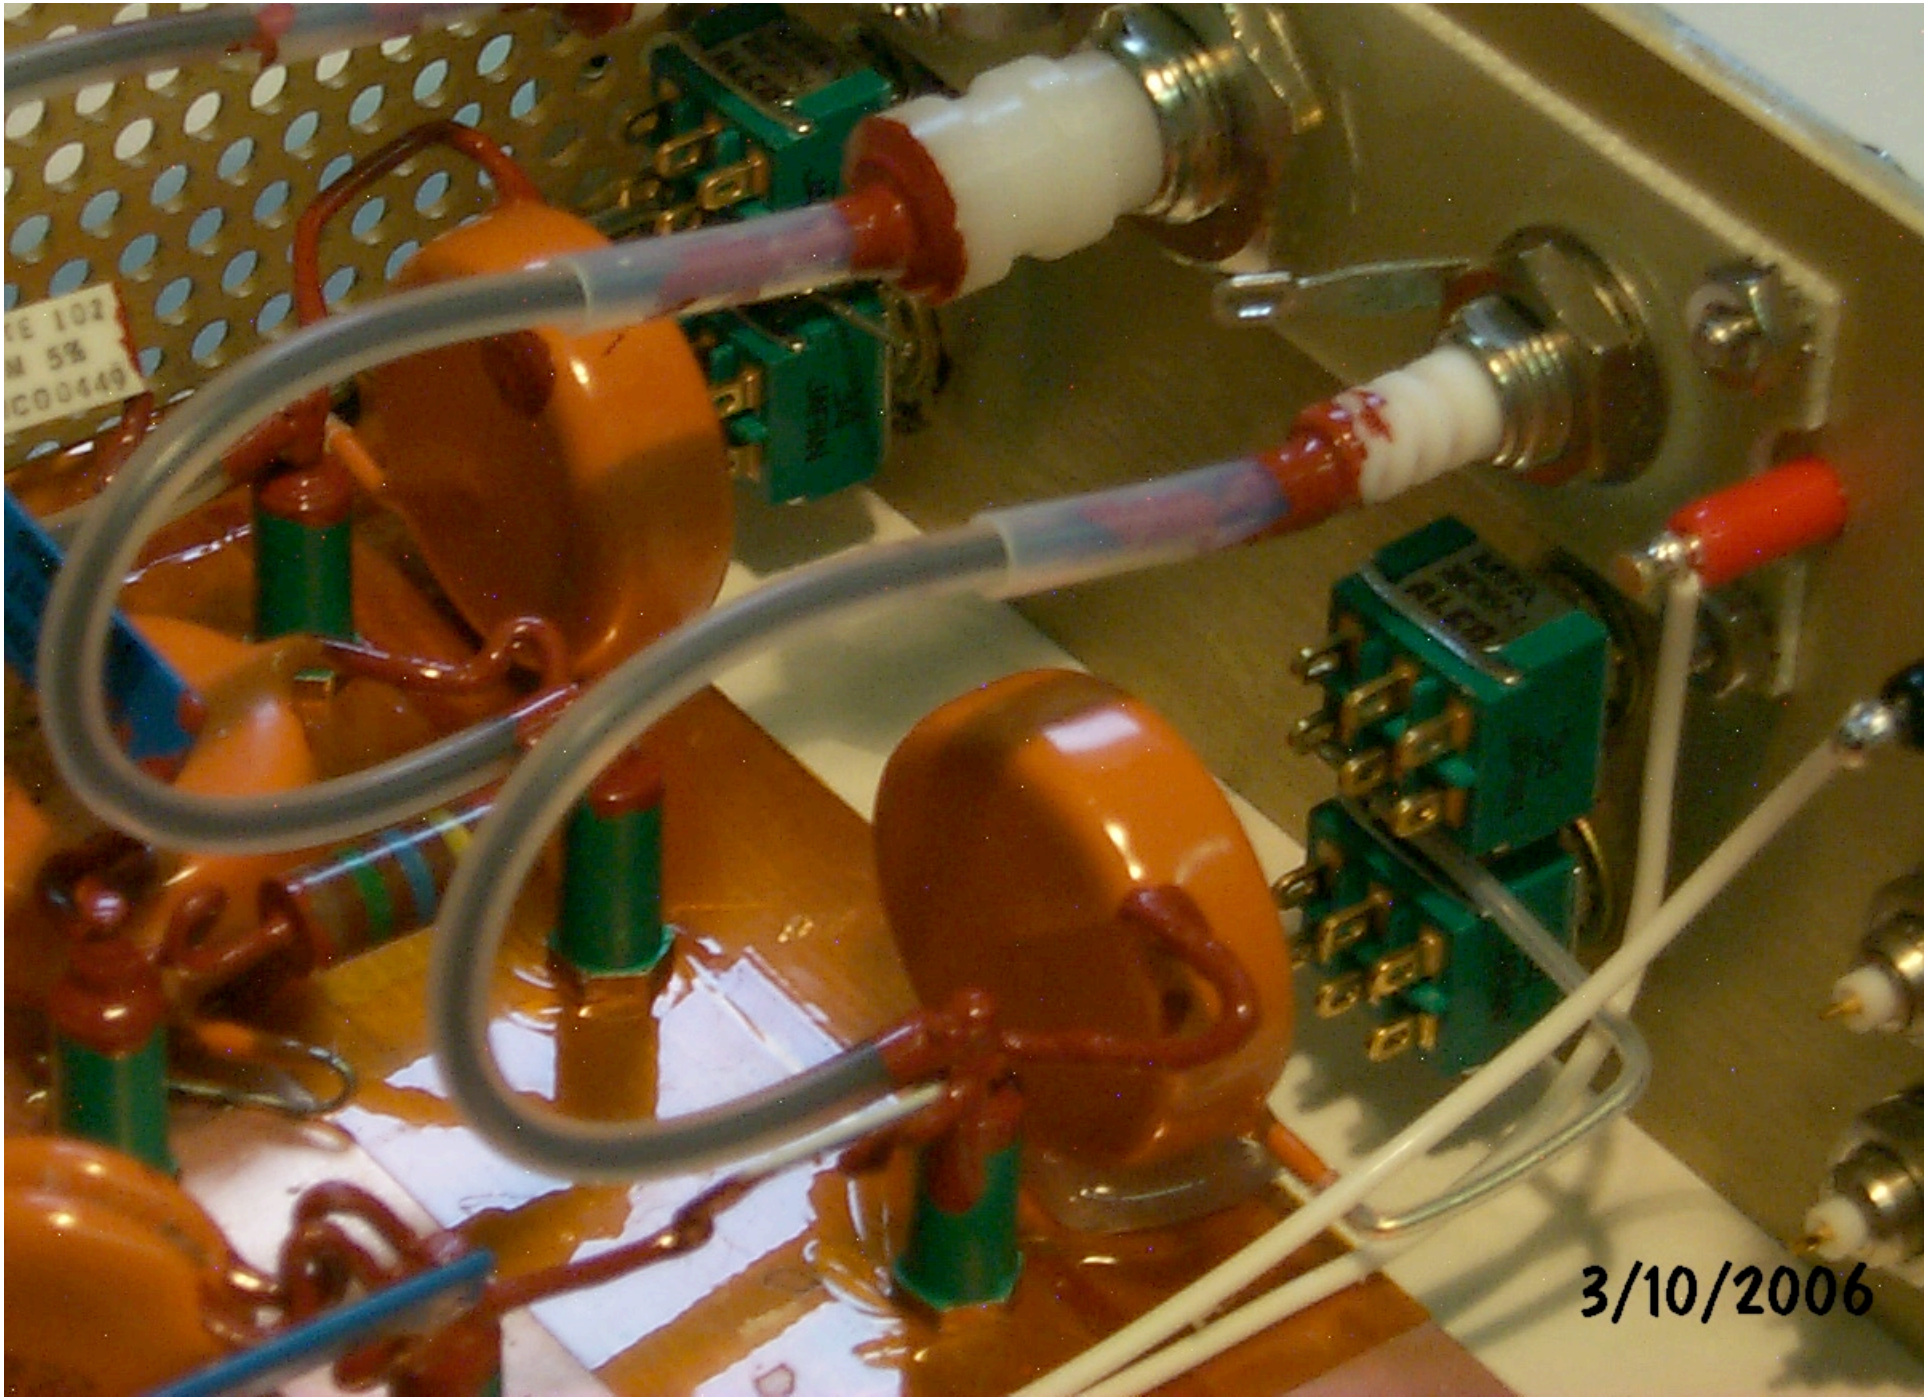
3/10/2006

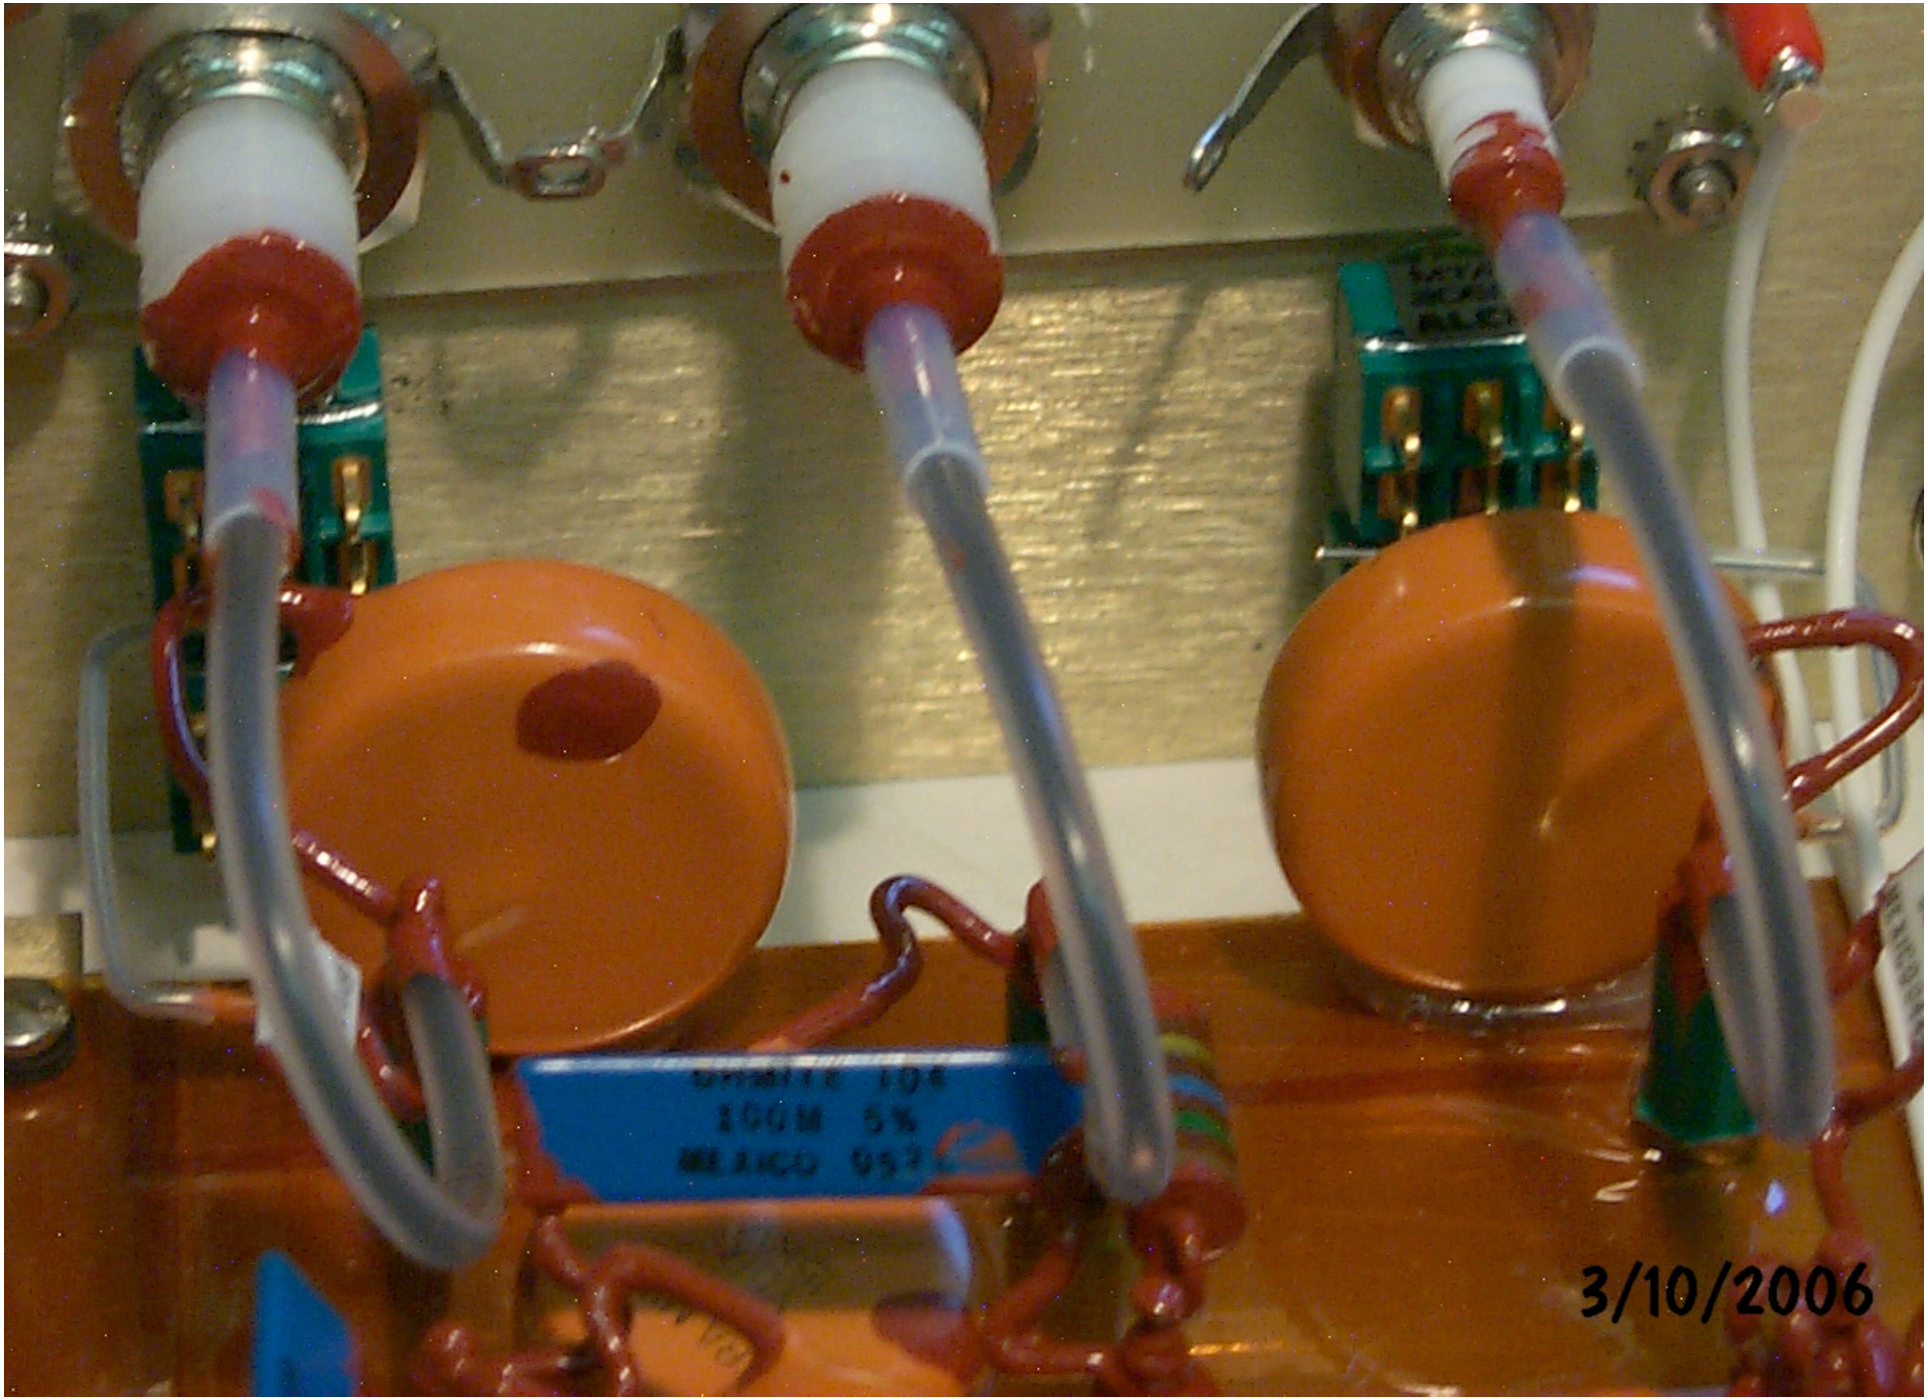
3/10/2006

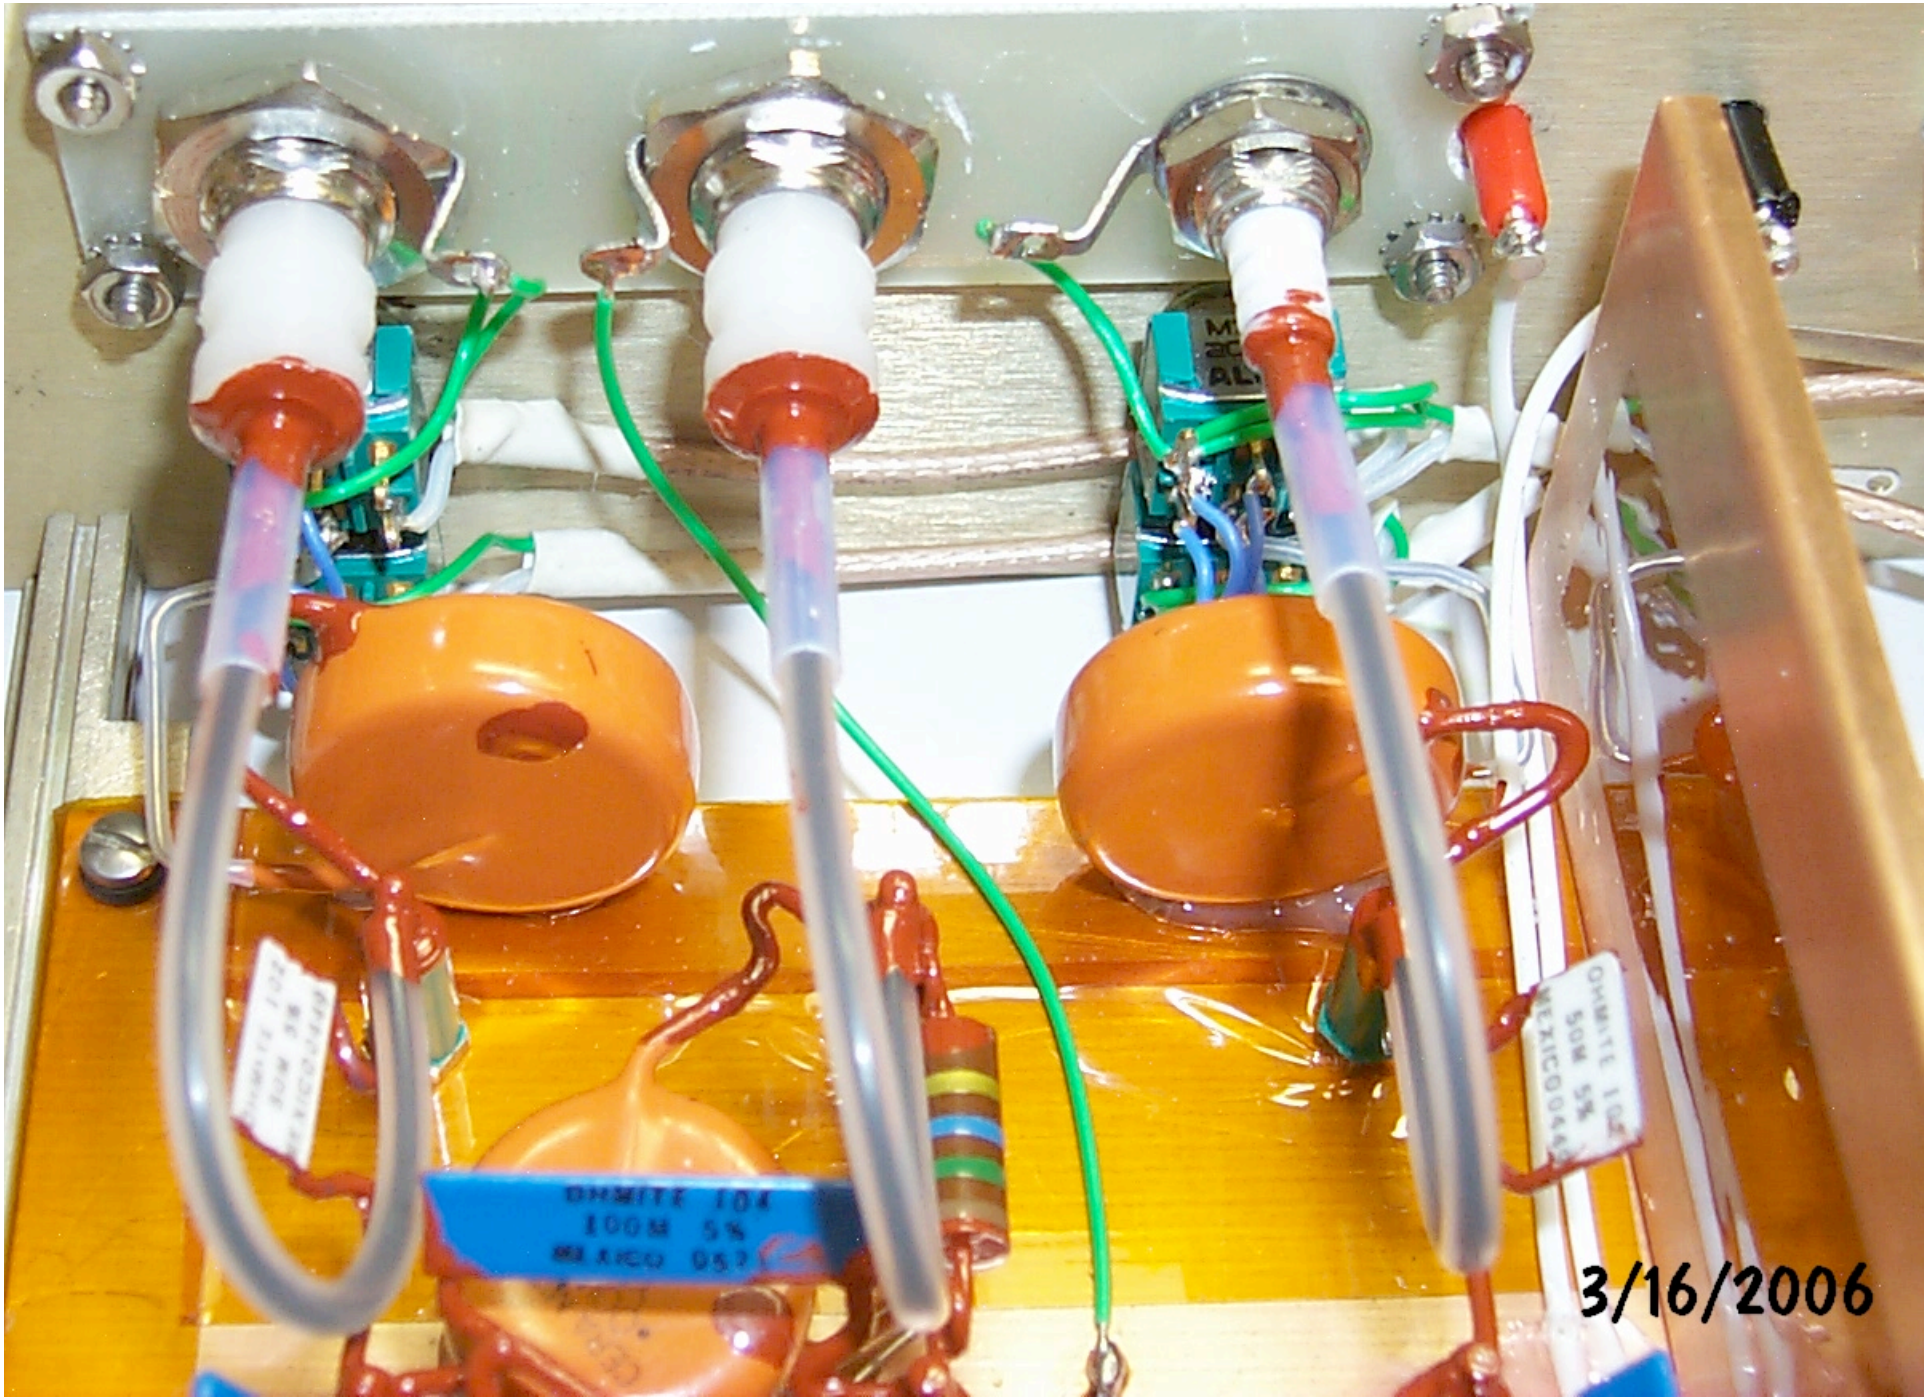
OHMITE 104
100M 5%
MEXICO 057
3/16/2006

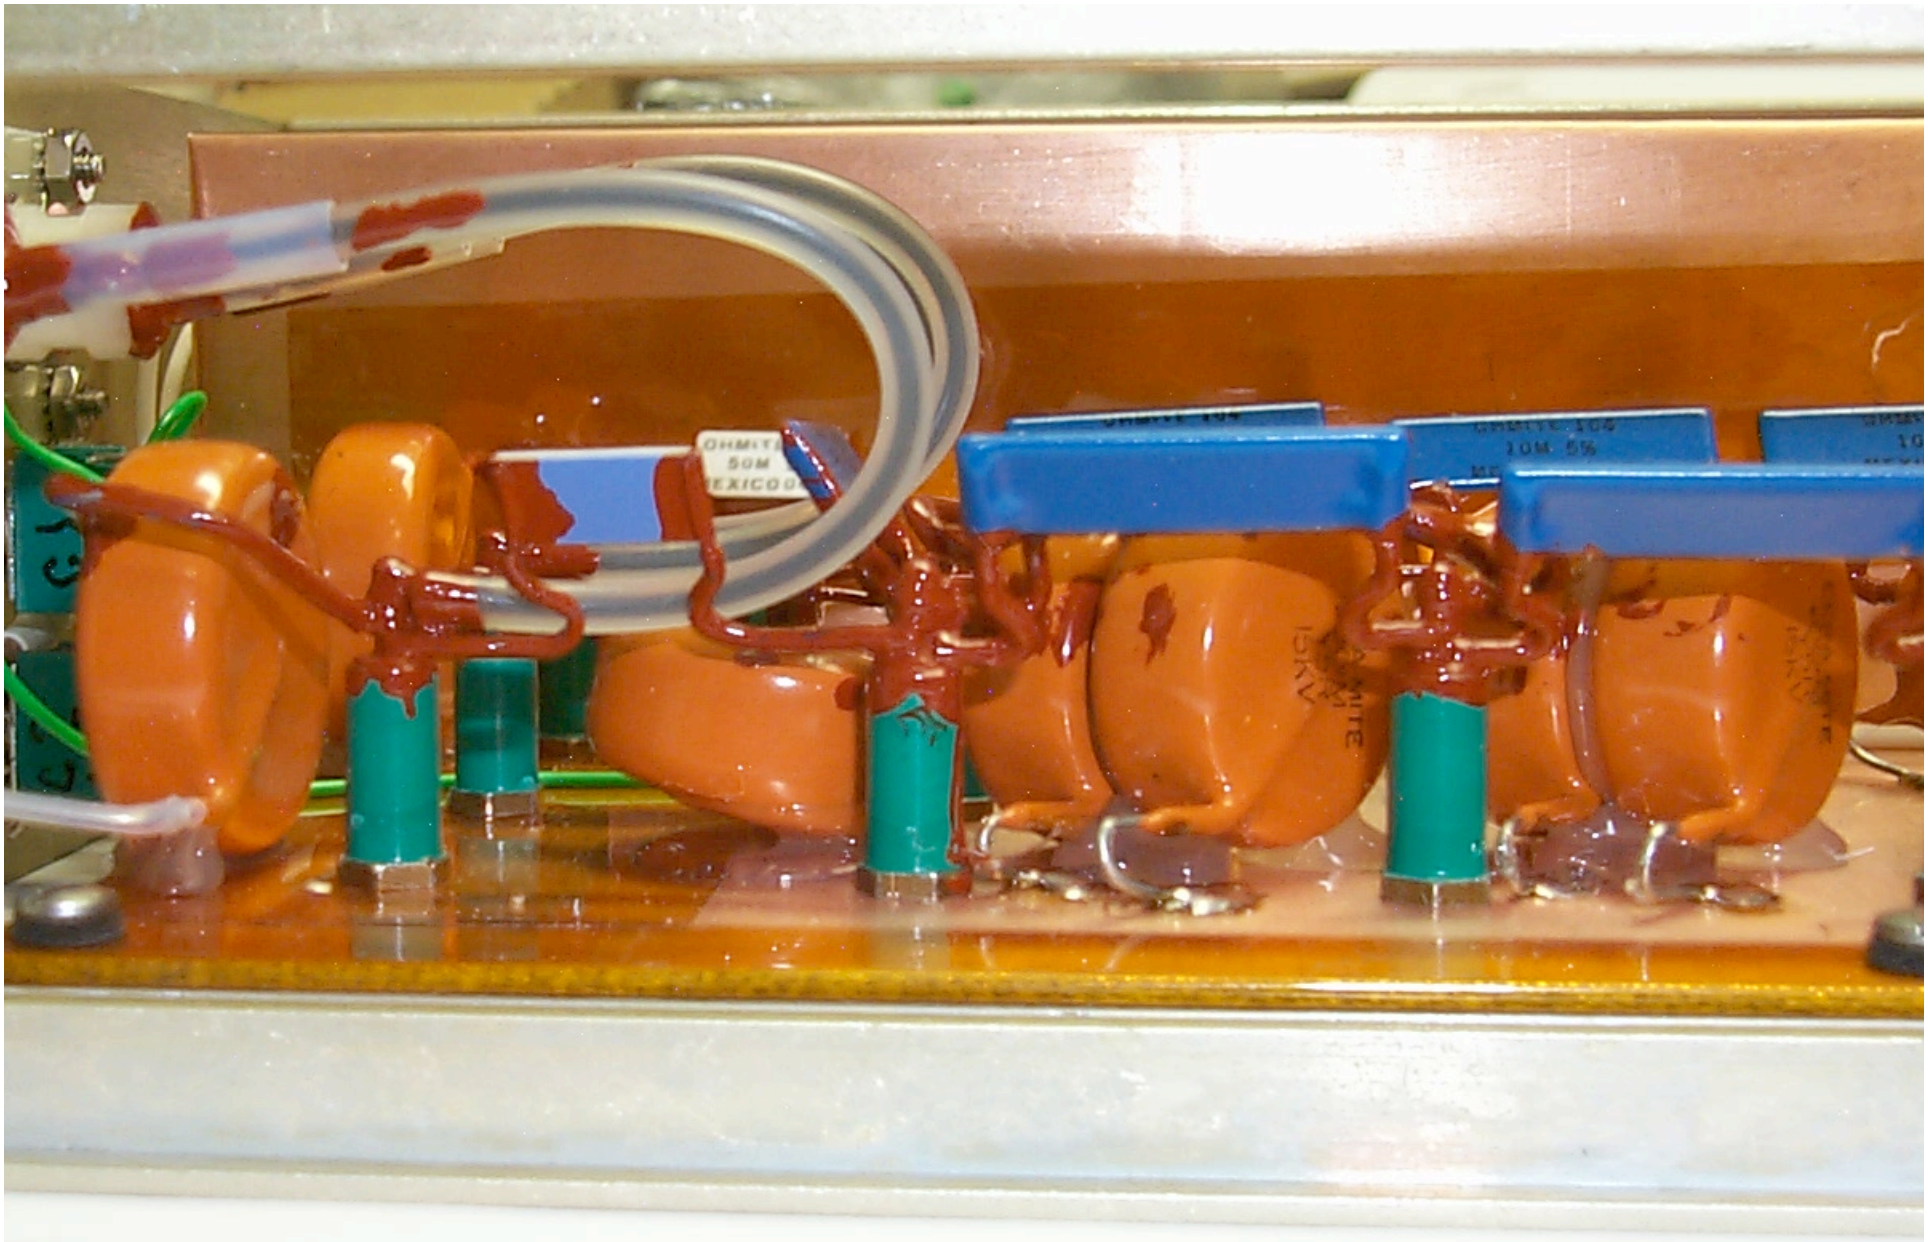

3/16/2006

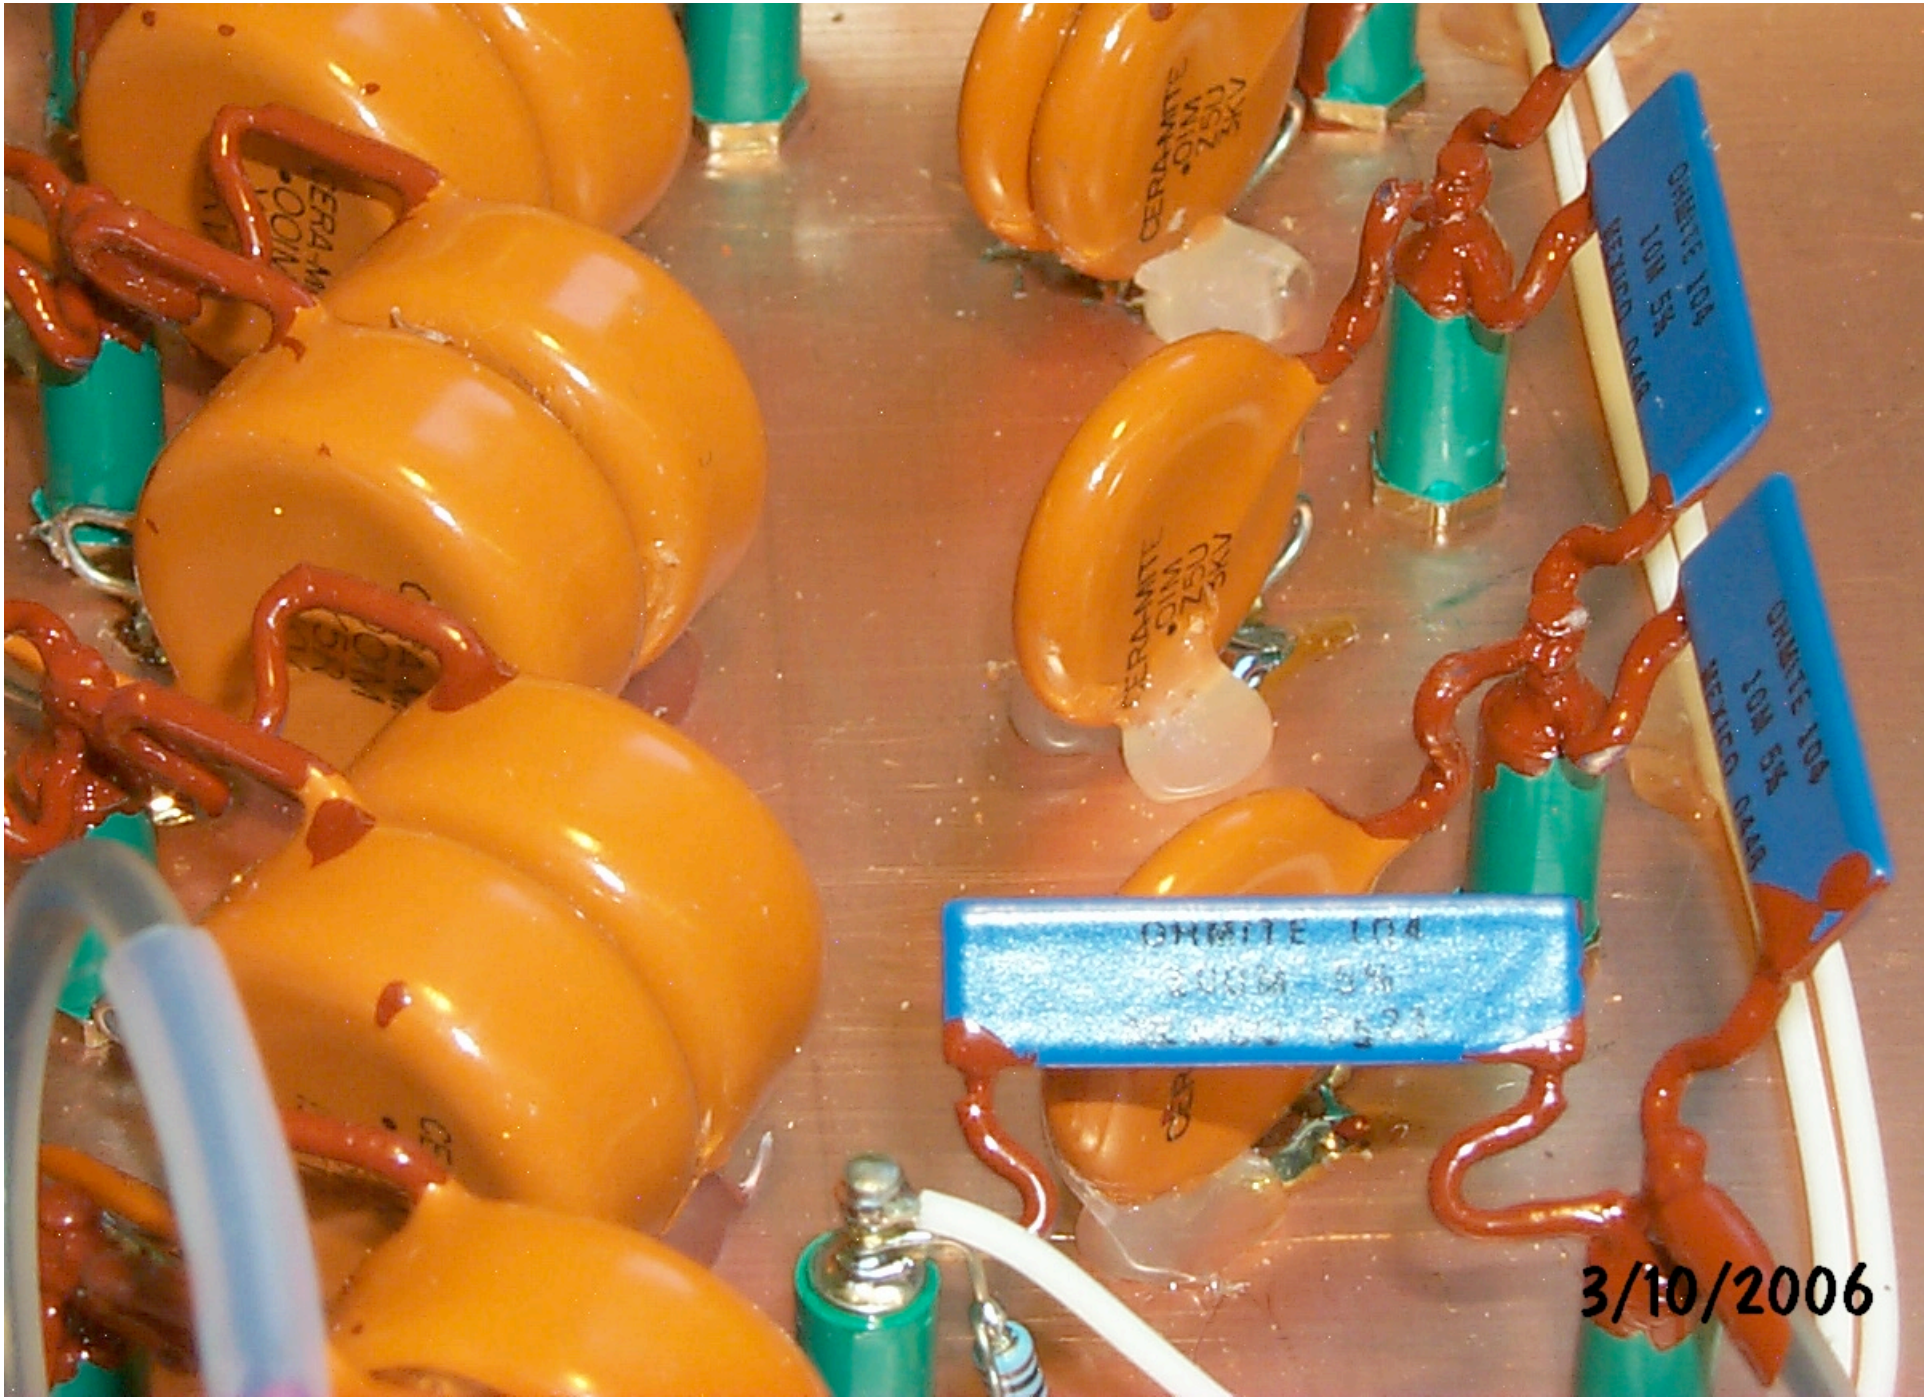
CERA-MITE
.01M
Z5U
3KV
OHMITE 104
10M 5%
MEXICO 044R
OHMITE 104
3/10/2006

3/16/2006

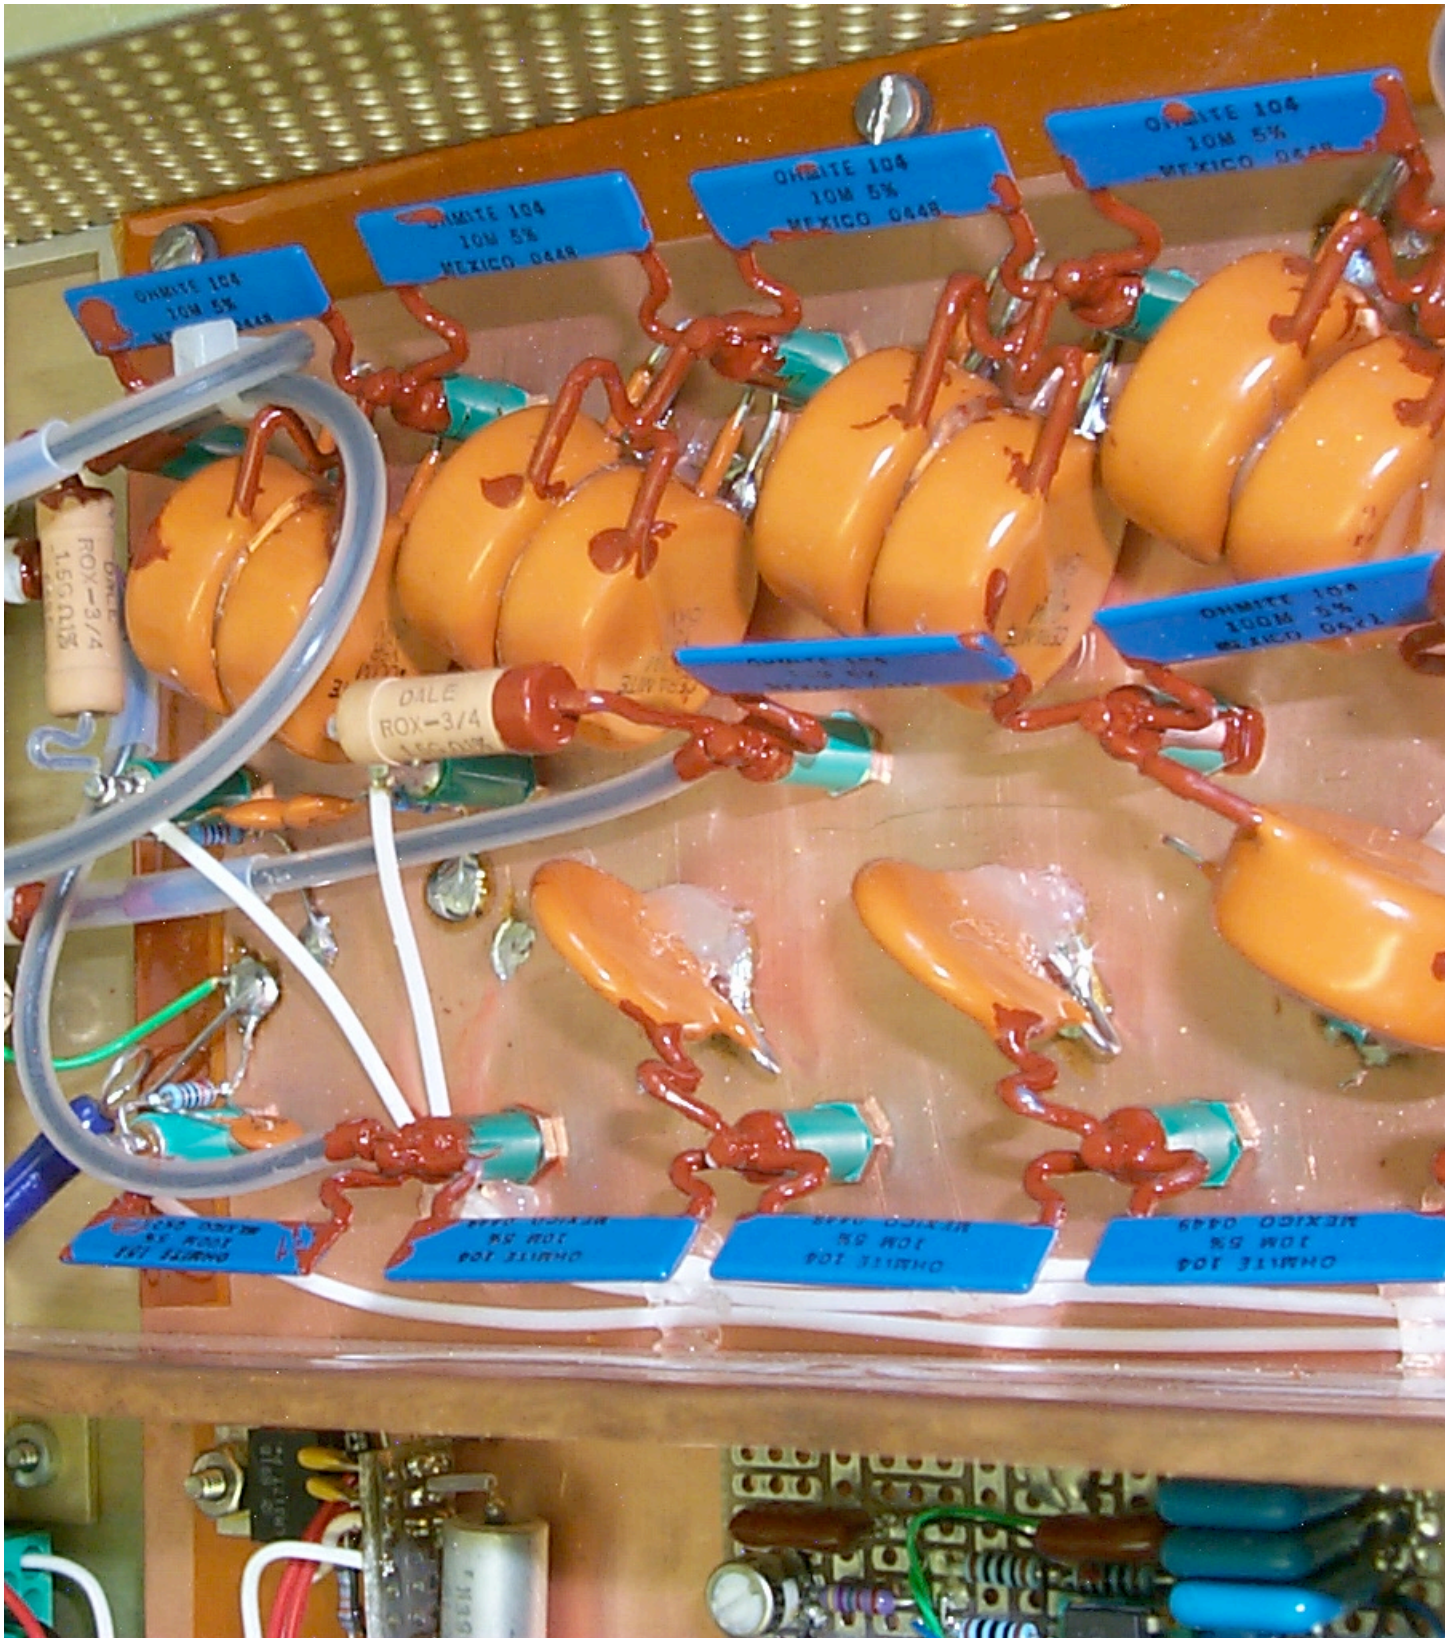
OHMITE 104
10W 5%
MEXICO 0448
DALE
ROX-3/4

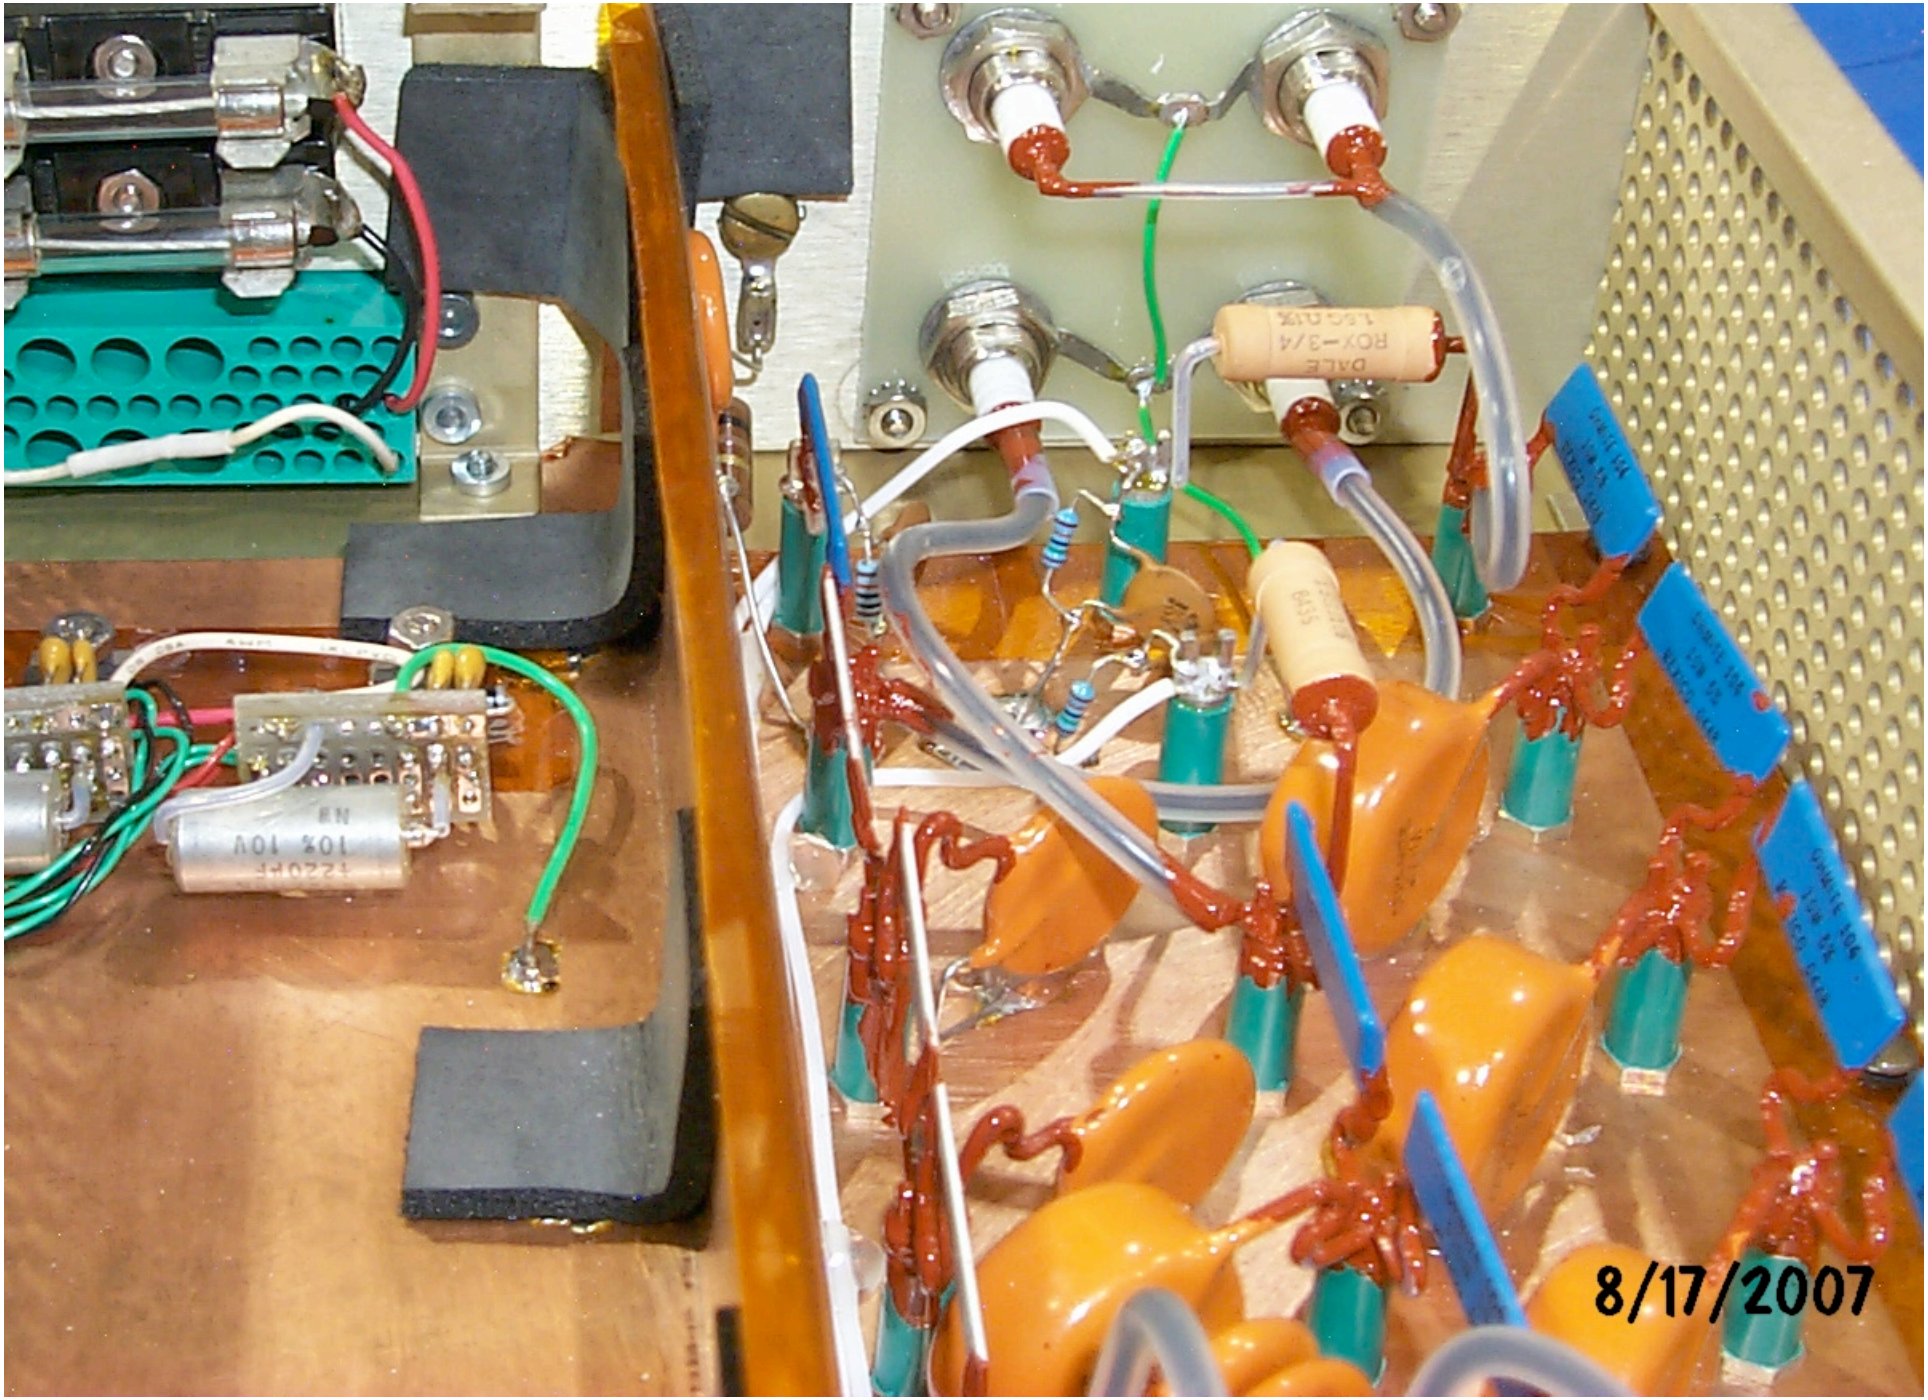
8/17/2007

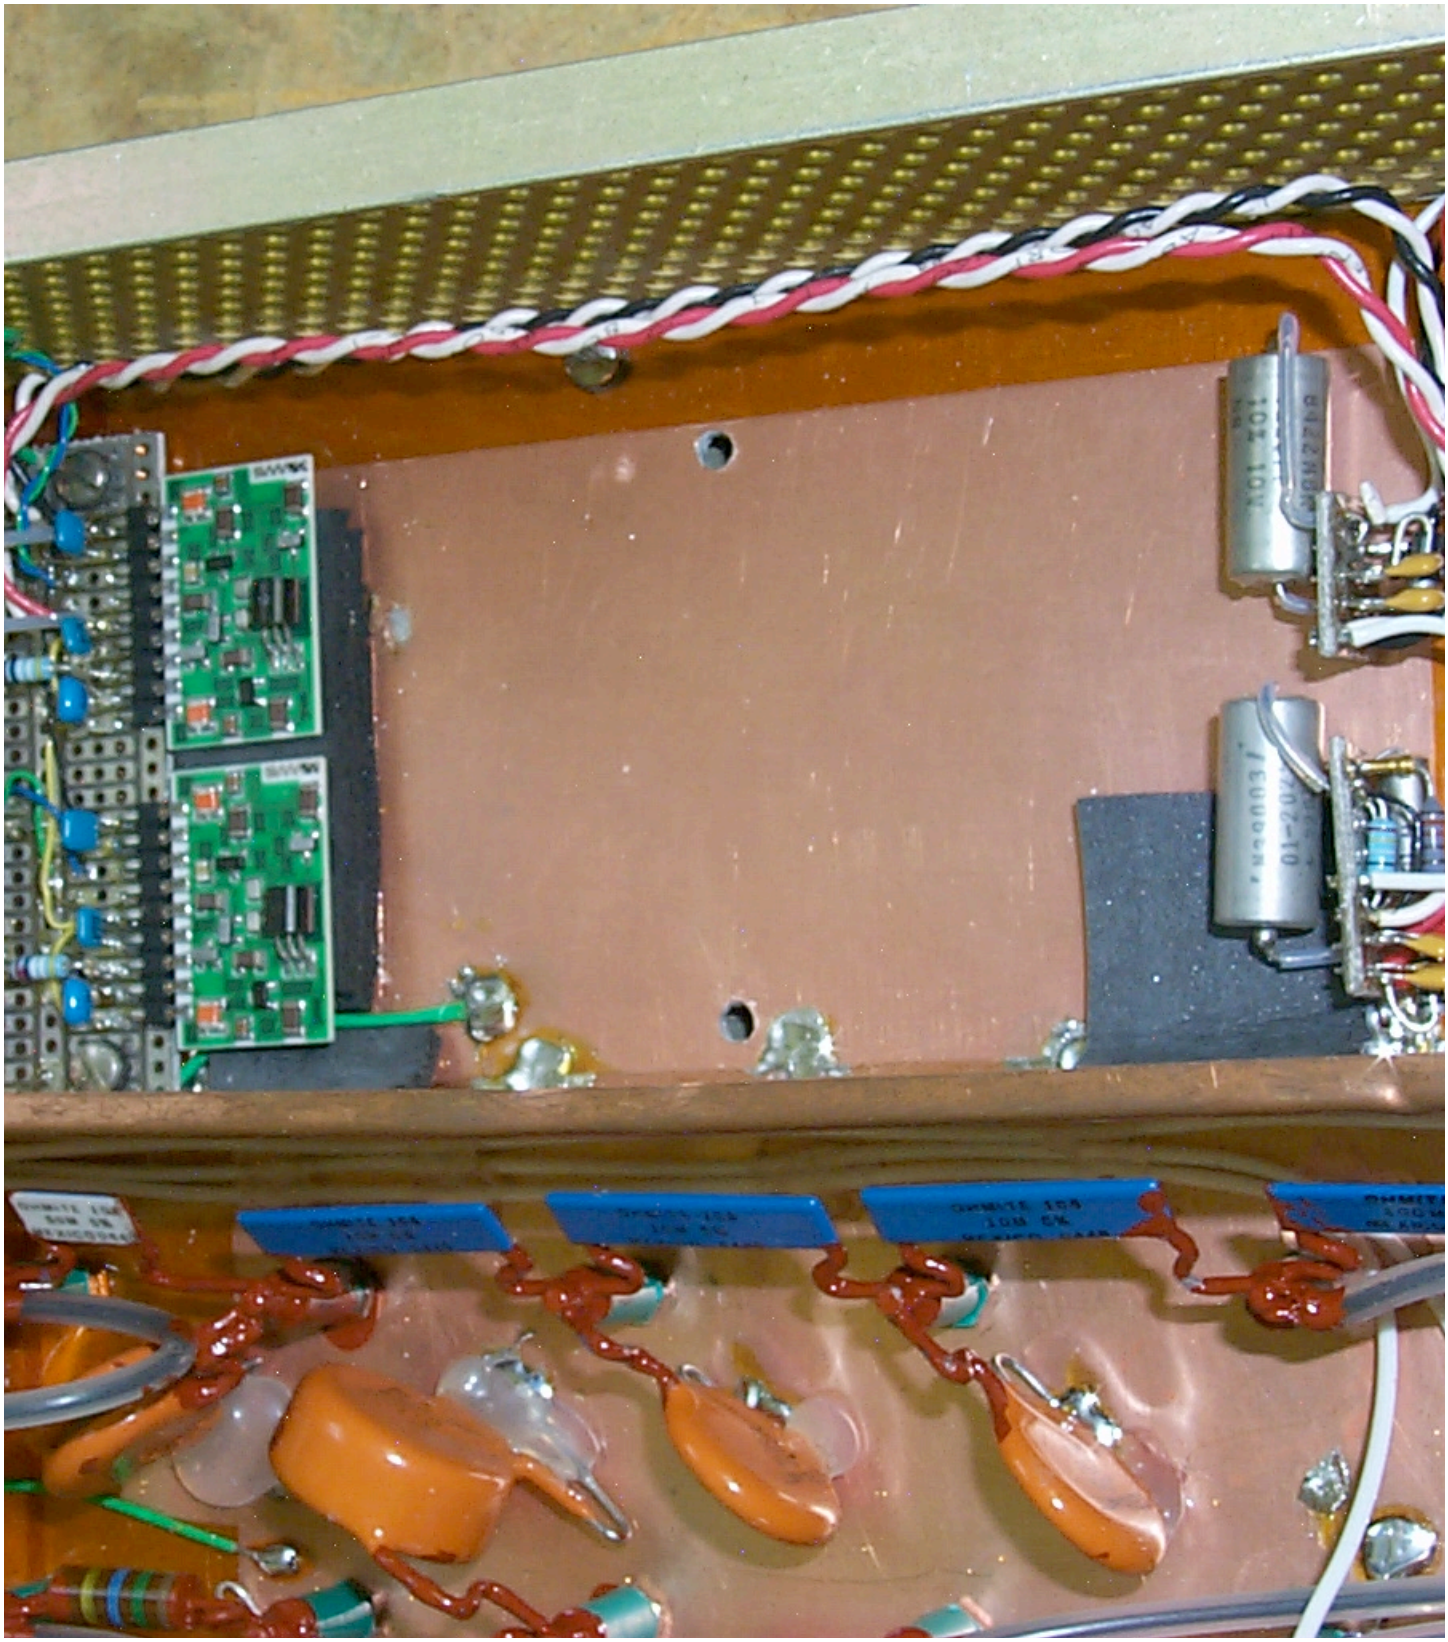

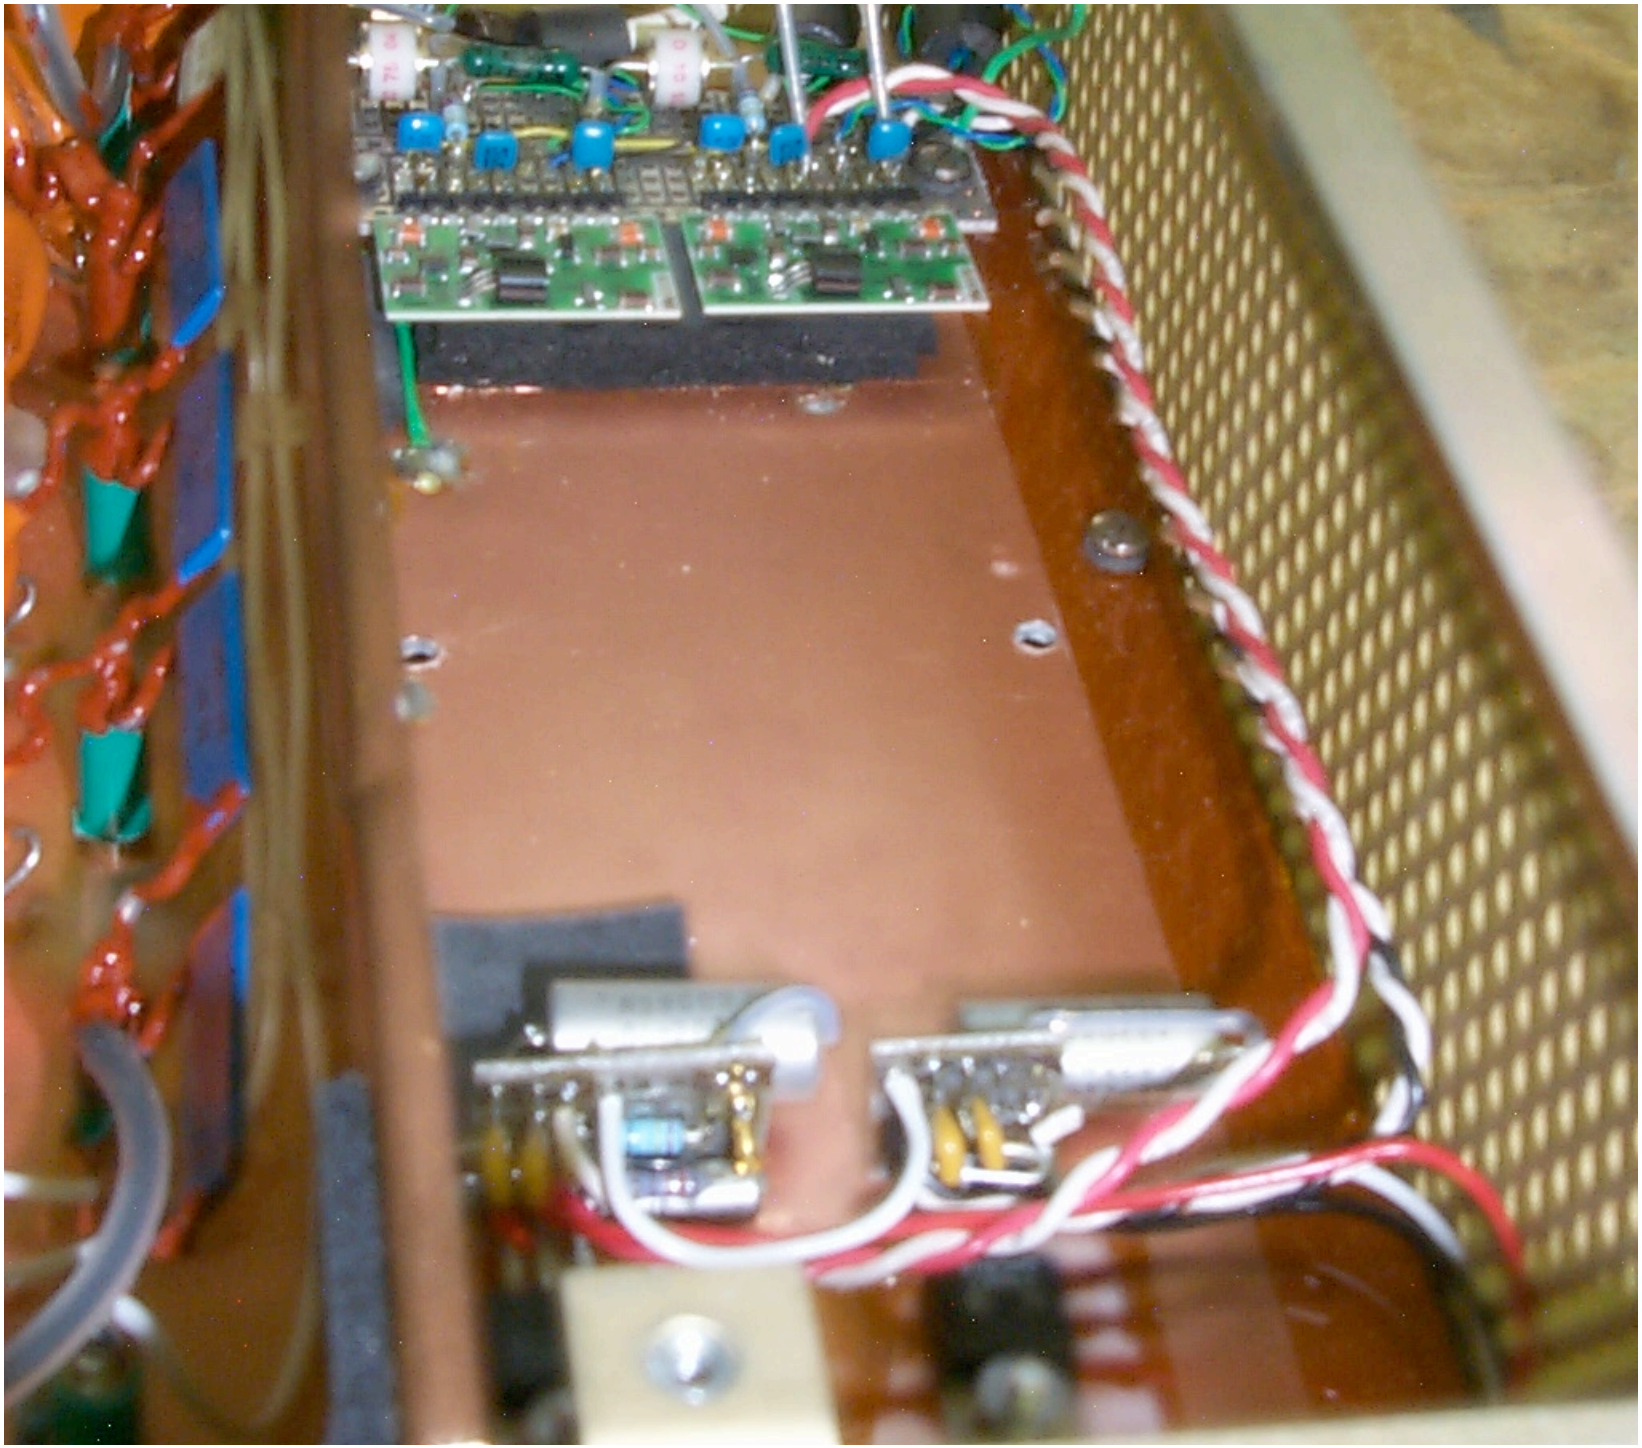

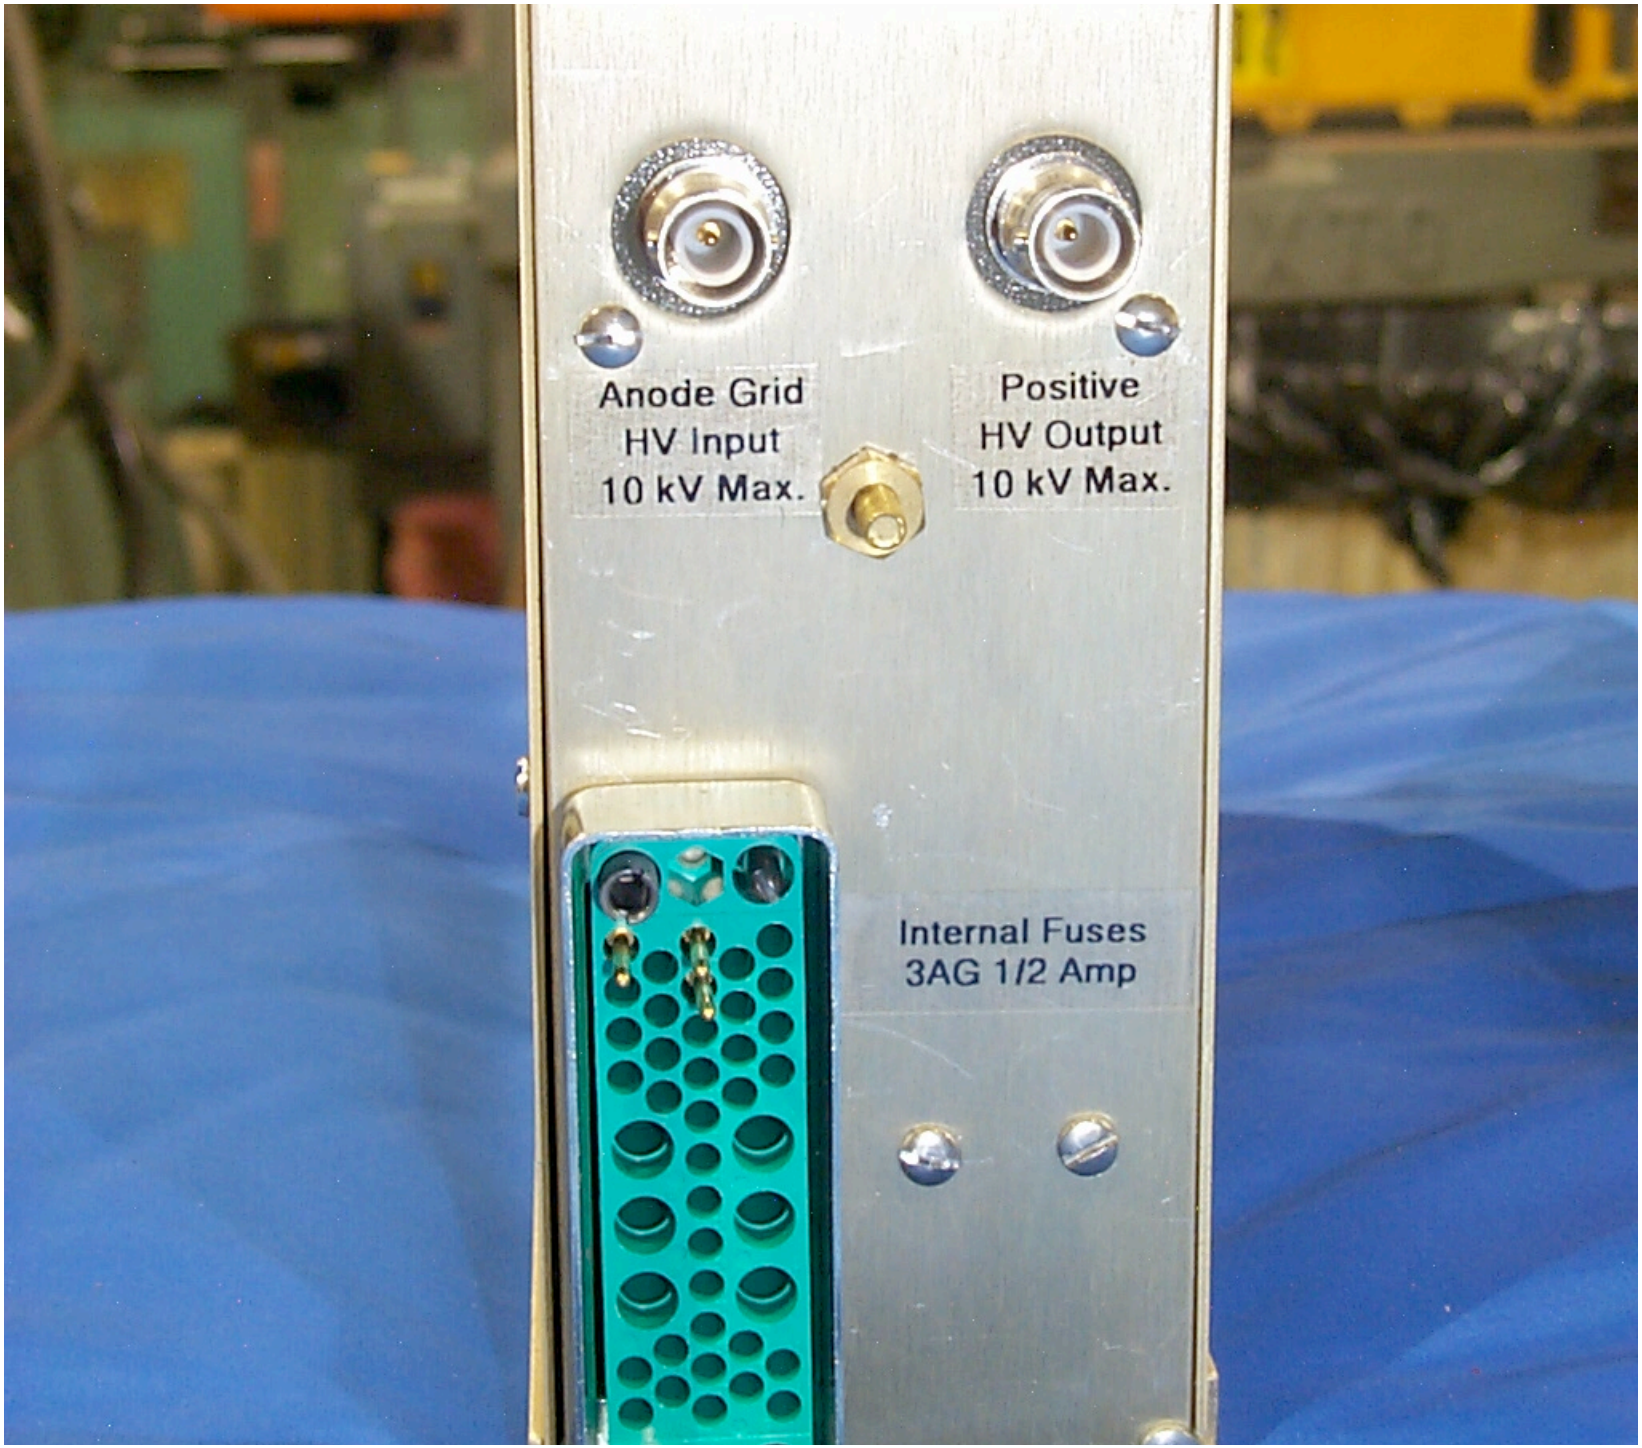
Anode Grid
HV Input
10 kV Max.
Positive
HV Output
10 kV Max.
Internal Fuses
3AG 1/2 Amp

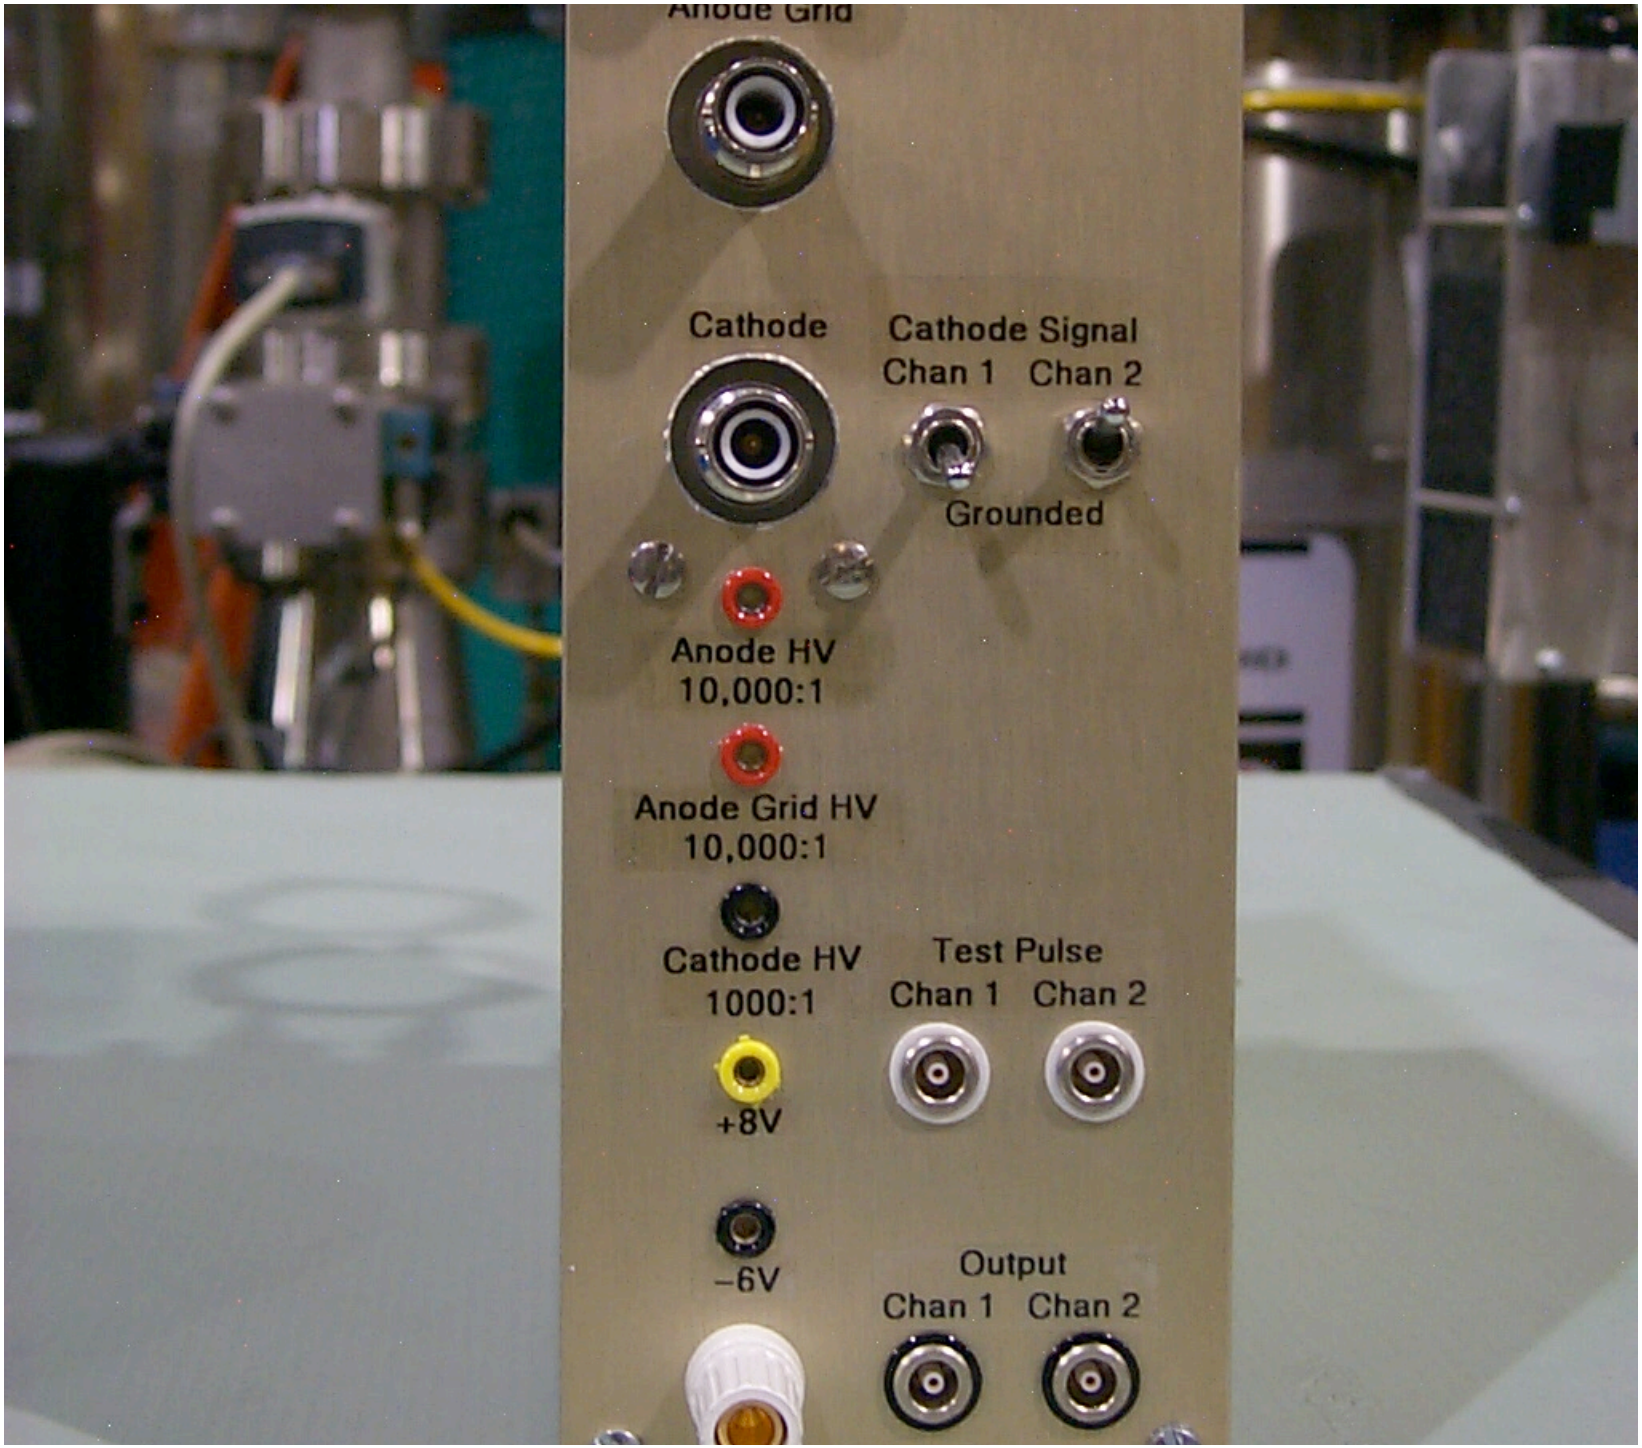
Anode Grid
Cathode
Cathode Signal
Chan 1
Chan 2
Grounded
Anode HV
10,000:1
Anode Grid HV
10,000:1
Cathode HV
1000:1
Test Pulse
Chan 1
Chan 2
+8V
−6V
Output
Chan 1
Chan 2