
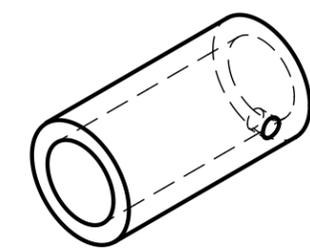
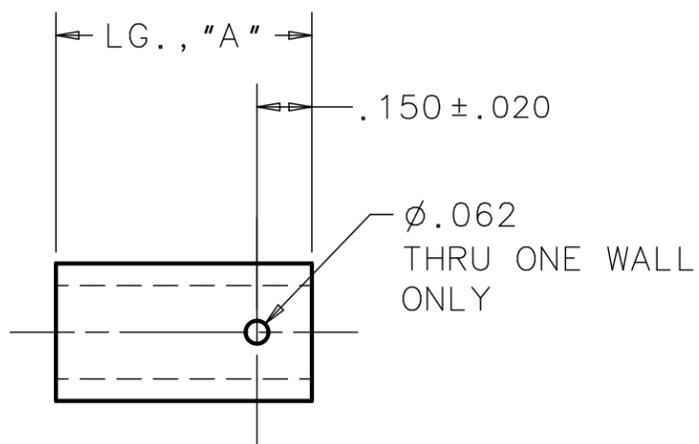


REV	DESCRIPTION	DRAWN	DATE
		APPROVED	DATE

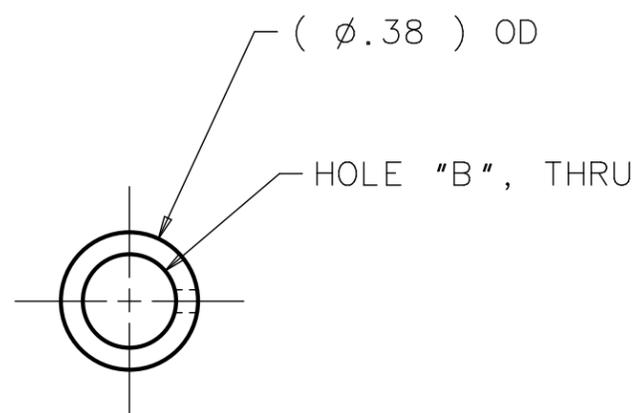

Item	LG., "A"	Hole, "B"	QTY.
-1*	.291	ø.255 ±.005	17
-2	.310	ø.255 ±.005	34
-3*	.681	ø.255 ±.005	1
-4*	.681	1/4-20 UNC	1
-5	.700	ø.255 ±.005	2
-6	.700	1/4-20 UNC	2

NOTE  
 \*SPACER -1, -3, & -4  
 ARE TO BE USED IN THE ROW  
 THAT HAS SOLDER CONNECTION TABS

UNLESS OTHERWISE SPECIFIED			ORIGINATOR	J.KRIDER	25-AUG-2006
.XX	.XXX	ANGLES	DRAWN	P.POLL	06-DEC-2006
± .02	± .005	± 1°	CHECKED	W.CYKO	14-SEP-2007
1. BREAK ALL SHARP EDGES .015 MAX. 2. DO NOT SCALE DRAWING. 3. DIMENSIONS BASED UPON ASME Y14.5M-1994 4. MAX. ALL MACH. SURFACES 125 / 5. DRAWING UNITS: U.S. INCH			APPROVED	J.KRIDER	14-SEP-2007
			USED ON		
			MATERIAL		
			PEEK, 3/8 OD x LENGTH AS NOTED IN CHART		

 **FERMI NATIONAL ACCELERATOR LABORATORY**  
 UNITED STATES DEPARTMENT OF ENERGY

**FLARE-MECHANICAL  
 DETECTORS  
 PURITY MONITOR CYLINDRIC SPACER**

SCALE	DRAWING NUMBER	SHEET	REV
2:1	3942.330-MB-444337	1 OF 1	

CREATED WITH : Ideas12NXSeries GROUP: PPD/MECHANICAL DEPARTMENT

NOTICE: IMAGE OBTAINED FROM FERMILAB WEB SITE  
 This information is provided for REFERENCE use only.  
 Not for MANUFACTURE, or DESIGN INFORMATION.  
 All information contained in this document represents  
 work sponsored by an agency of the U.S. Government.  
 Neither the U.S. Government nor any agency thereof,  
 nor Universities Research Association, Inc., nor any of  
 their employees or officers, makes any warranty, express  
 or implied, or assumes any legal liability or  
 responsibility for the accuracy, completeness, or  
 usefulness of any information, apparatus, product or  
 process disclosed, or represents that its use would not  
 infringe privately owned rights.